



南京大學

NANJING UNIVERSITY

# 无线网络和移动网络

殷亚凤

智能软件与工程学院

苏州校区南雍楼东区225

yafeng@nju.edu.cn , <https://yafengnju.github.io/>



# Outline


---

- Introduction
- Wireless
  - Wireless Links and network characteristics
  - CDMA: code division multiple access
  - WiFi: 802.11 wireless LANs
  - Cellular networks: 4G and 5G
- Mobility
  - Mobility management: principles
  - Mobility management: practice
  - Mobility: impact on higher-layer protocols






# Elements of a wireless network

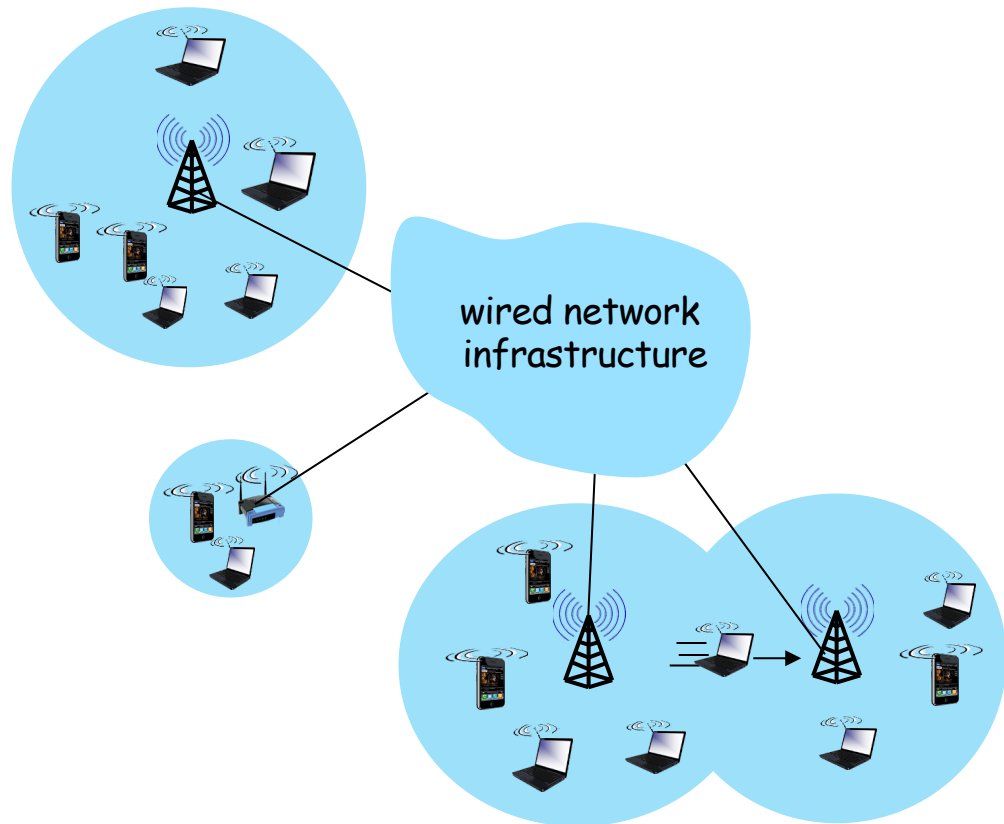



# Elements of a wireless network

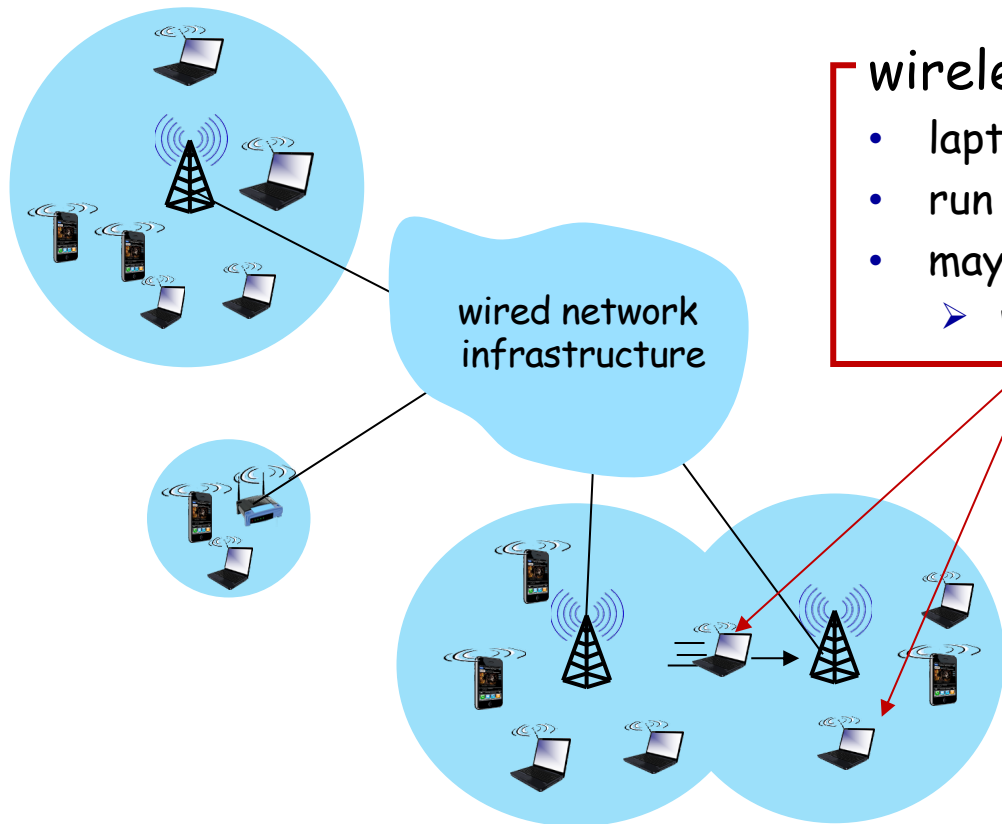


## wireless hosts

- laptop, smartphone, IoT
- run applications
- may be **stationary (non-mobile)** or **mobile**
  - wireless does *not* always mean mobility!





# Elements of a wireless network

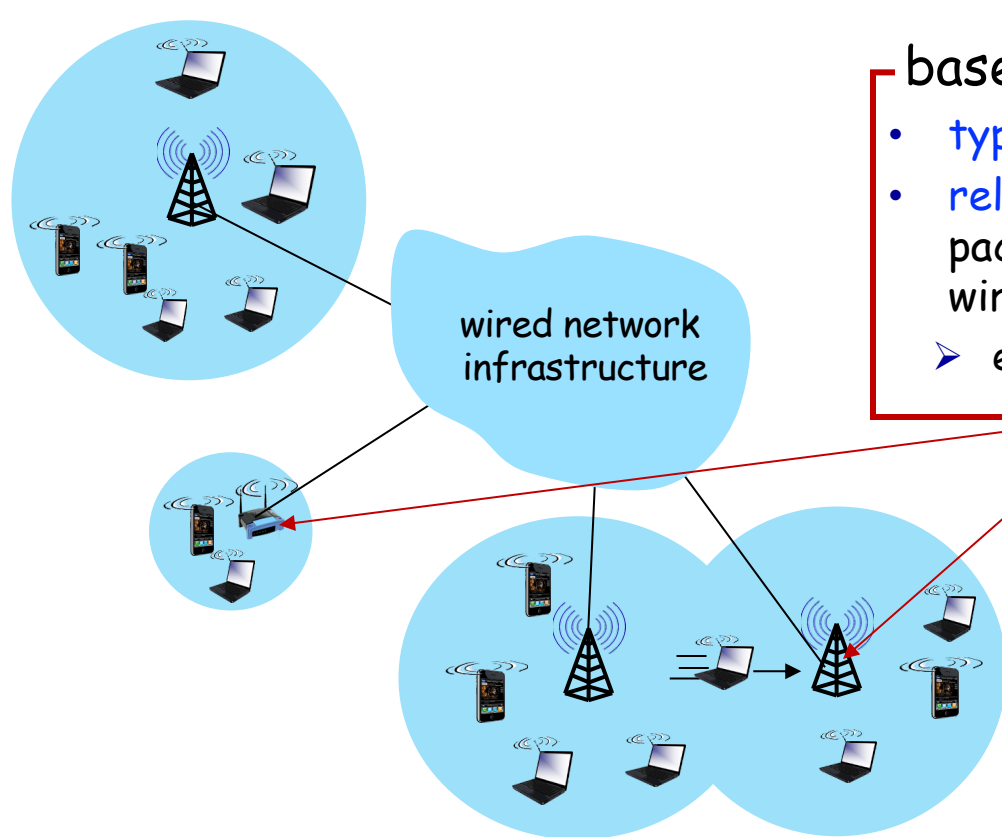

base station




- typically connected to wired network
  - relay - responsible for sending packets between wired network and wireless host(s) in its "area"
- e.g., cell towers, 802.11 access points





# Elements of a wireless network

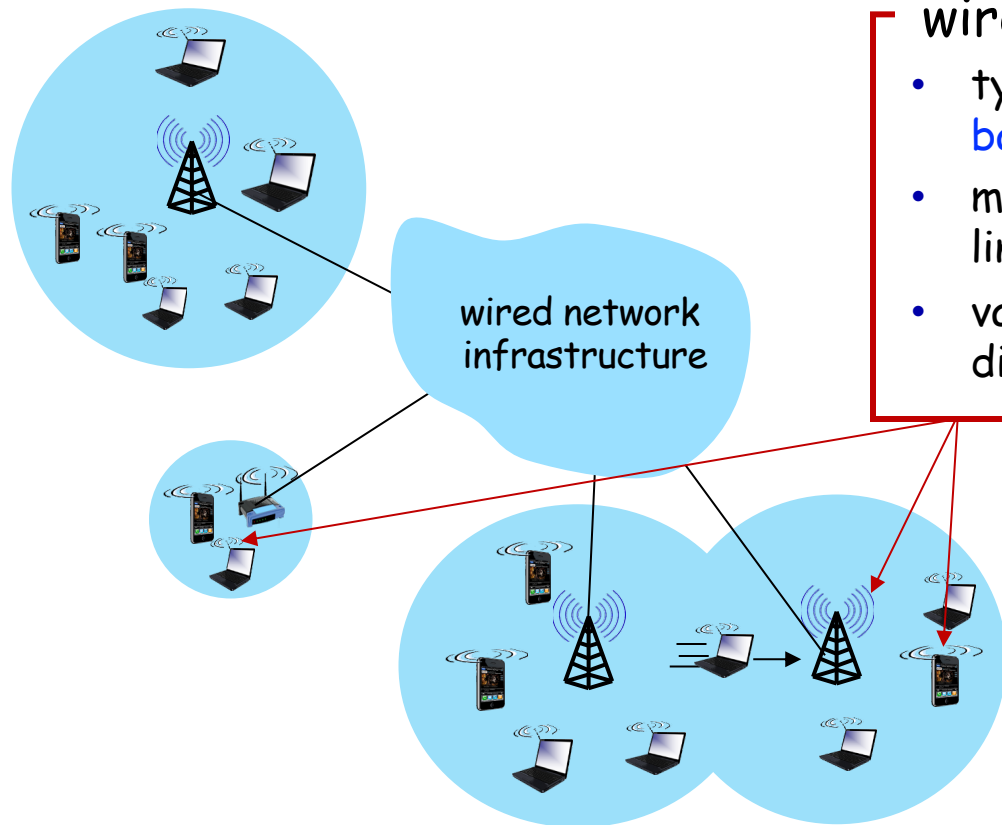

## wireless link




- typically used to **connect mobile(s) to base station**, also used as backbone link
- multiple access protocol coordinates link access
- various transmission rates and distances, frequency bands






# Characteristics of selected wireless links

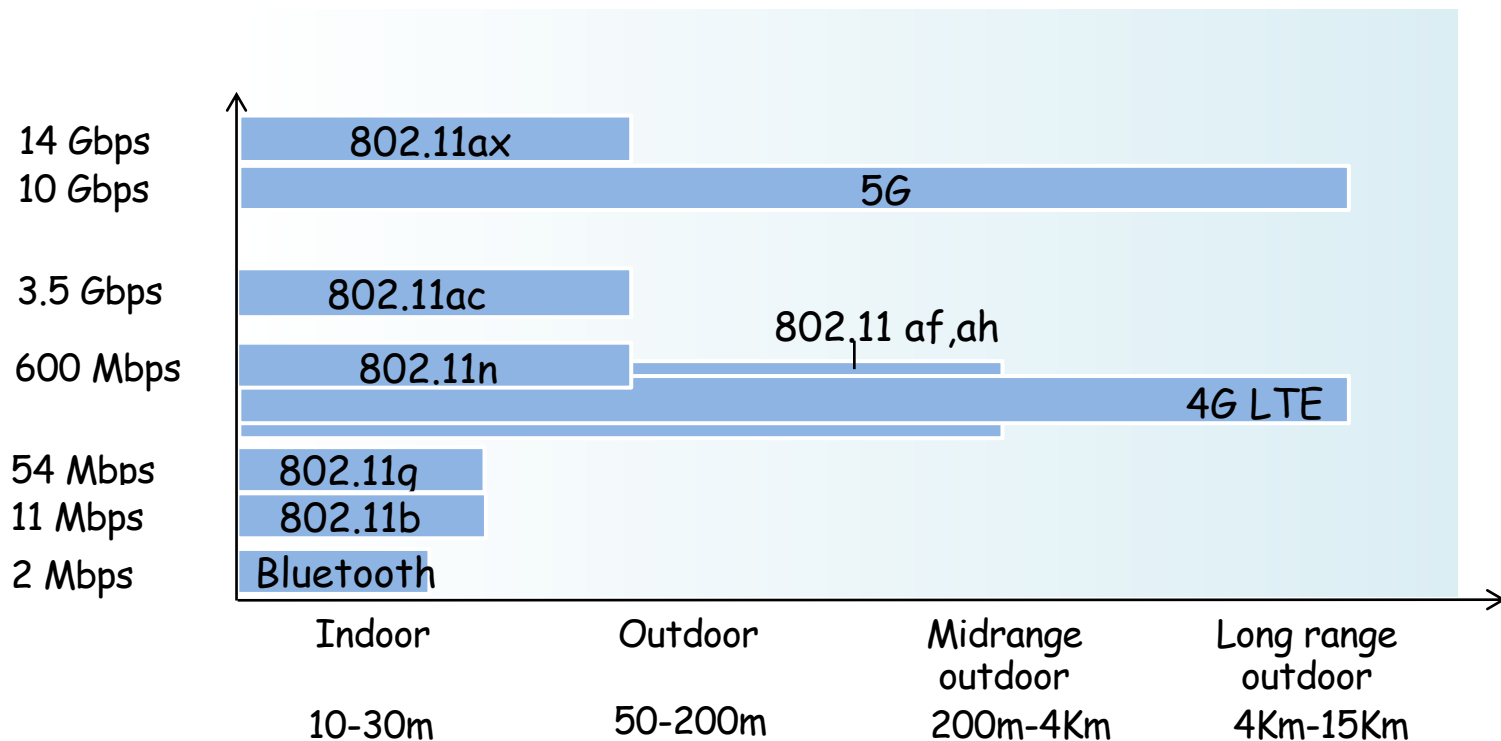



# Elements of a wireless network

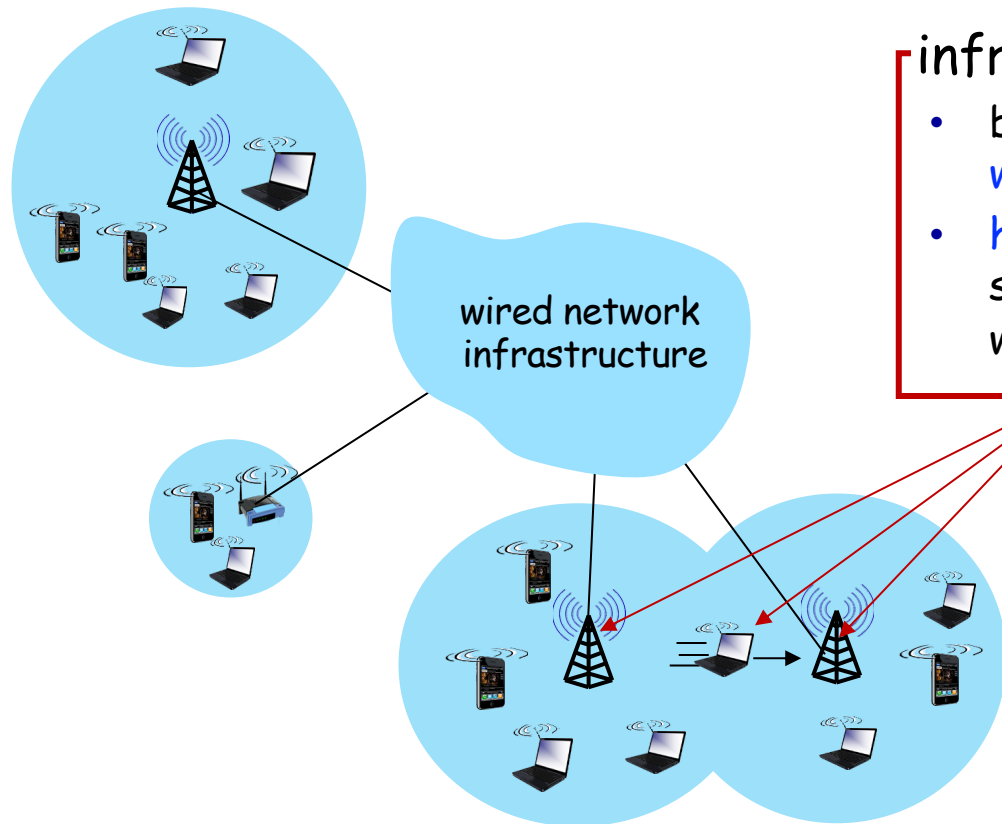


## infrastructure mode

- base station connects mobiles into **wired network**
- **handoff**: mobile changes base station providing connection into wired network





# Elements of a wireless network

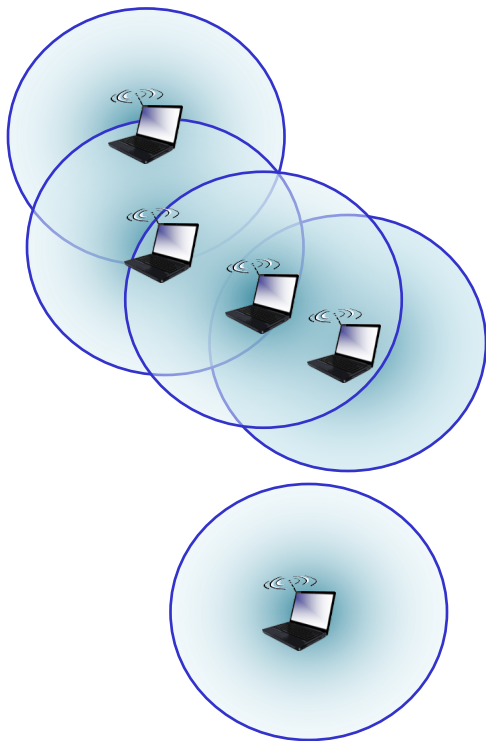

## ad hoc mode

- no base stations
- nodes can only transmit to other nodes within link coverage
- nodes organize themselves into a network: route among themselves





# Wireless network taxonomy

	single hop	multiple hops
infrastructure (e.g., APs)	host <b>connects to base station</b> (WiFi, cellular) which connects to larger Internet	host may have to relay through several wireless nodes to <b>connect to larger Internet</b> : <i>mesh net</i>
<i>no infrastructure</i>	<b>no base station</b> , no connection to larger Internet (Bluetooth, ad hoc nets)	no base station, no connection to larger Internet. May <b>have to relay</b> to reach other a given wireless node MANET, VANET





# Outline

---

- Introduction
- Wireless
  - Wireless Links and network characteristics
  - CDMA: code division multiple access
  - WiFi: 802.11 wireless LANs
  - Cellular networks: 4G and 5G
- Mobility
  - Mobility management: principles
  - Mobility management: practice
  - Mobility: impact on higher-layer protocols






# Wireless link characteristics: fading (attenuation)

**Wireless** radio signal attenuates (loses power) as it propagates (free space "path loss")

Free space path loss  $\sim (fd)^2$

$f$ : frequency  
 $d$ : distance

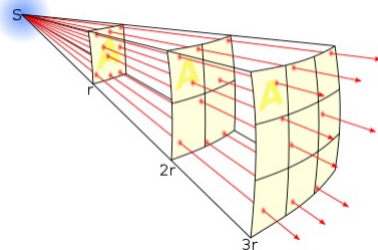

higher frequency or  
longer distance




larger free space  
path loss





# Wireless link characteristics: multipath


**multipath propagation:** radio signal reflects off objects ground, built environment, arriving at destination at slightly different times

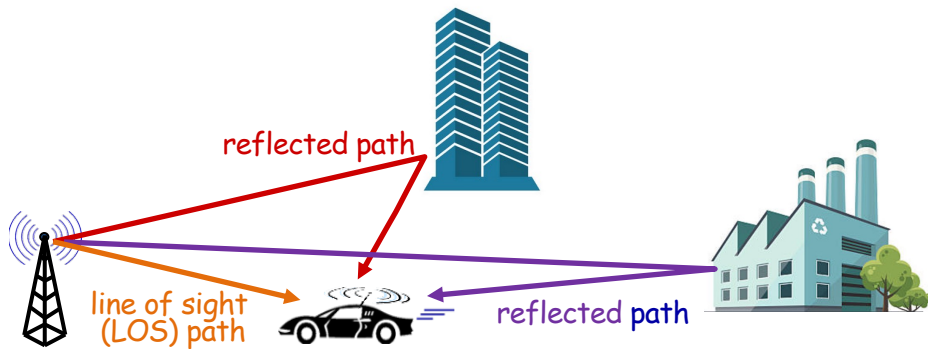



# Wireless link characteristics: multipath

**multipath propagation:** radio signal reflects off objects ground, built environment, arriving at destination at slightly different times

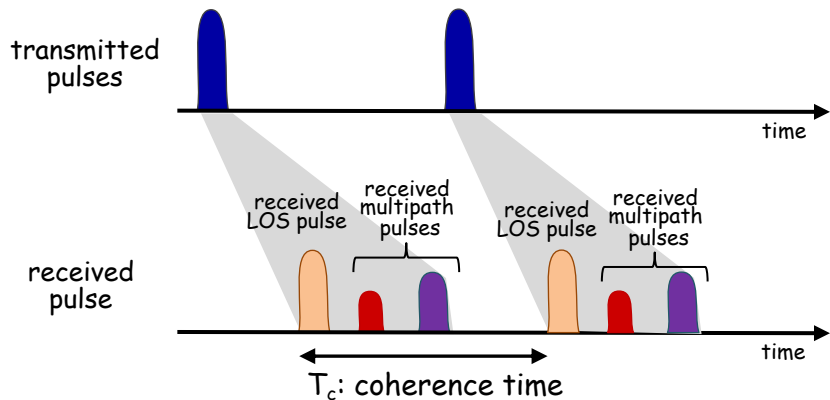

## Coherence time:


- amount of time bit is present in channel to be received
- influences maximum possible transmission rate, since coherence times can not overlap
- inversely proportional to
  - frequency
  - receiver velocity





# Wireless link characteristics: noise

- interference from other sources on wireless network frequencies: motors, appliances
- SNR: signal-to-noise ratio
  - larger SNR - easier to extract signal from noise (a "good thing")
- SNR versus BER tradeoff
  - given physical layer: increase power - > increase SNR->decrease BER
  - SNR may change with mobility: dynamically adapt physical layer (modulation technique, rate)

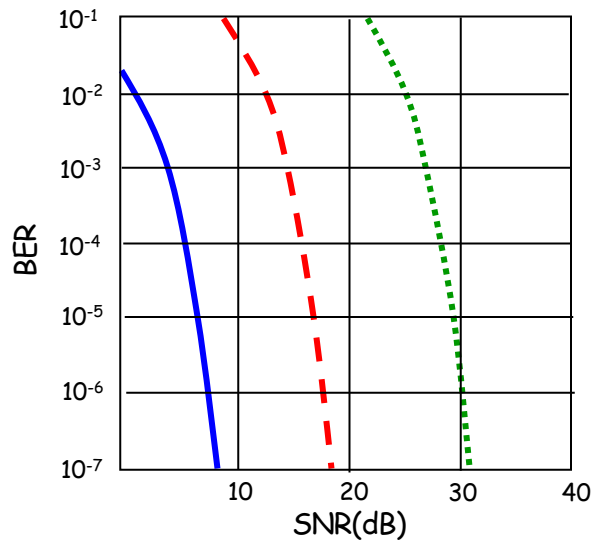


- ..... QAM256 (8 Mbps)
- - - QAM16 (4 Mbps)
- BPSK (1 Mbps)






# Wireless link characteristics: hidden terminals

## Hidden terminal problem

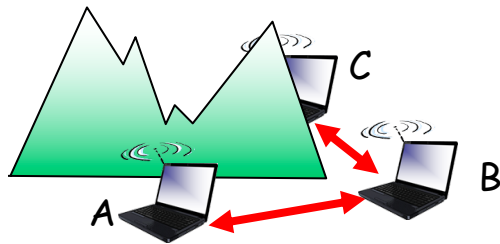

- B, A hear each other
- B, C hear each other
- A, C can not hear each other means A, C unaware of their interference at B

## Attenuation also causes "hidden terminals"

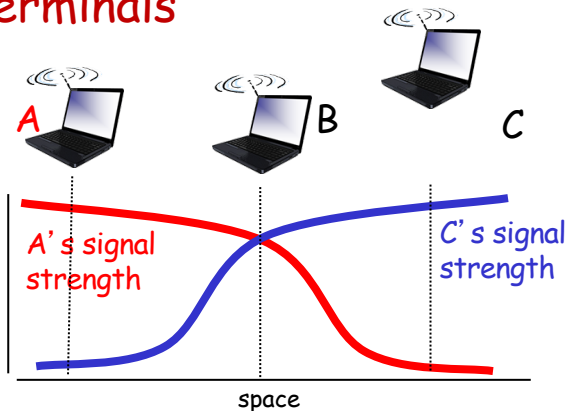

- B, A hear each other
- B, C hear each other
- A, C can not hear each other interfering at B



# Outline

---

- Introduction
- Wireless
  - Wireless Links and network characteristics
  - CDMA: code division multiple access
  - WiFi: 802.11 wireless LANs
  - Cellular networks: 4G and 5G
- Mobility
  - Mobility management: principles
  - Mobility management: practice
  - Mobility: impact on higher-layer protocols






# Code Division Multiple Access (CDMA)

- unique "code" assigned to each user; i.e., code set partitioning
  - all users share same frequency, but **each user has own "chipping" sequence** (i.e., code) to encode data
  - allows multiple users to "coexist" and **transmit simultaneously with minimal interference** (if codes are "orthogonal")
- **encoding**: inner product: (original data)  $\times$  (chipping sequence)
- **decoding**: summed inner-product: (encoded data)  $\times$  (chipping sequence)





# CDMA encode/decode

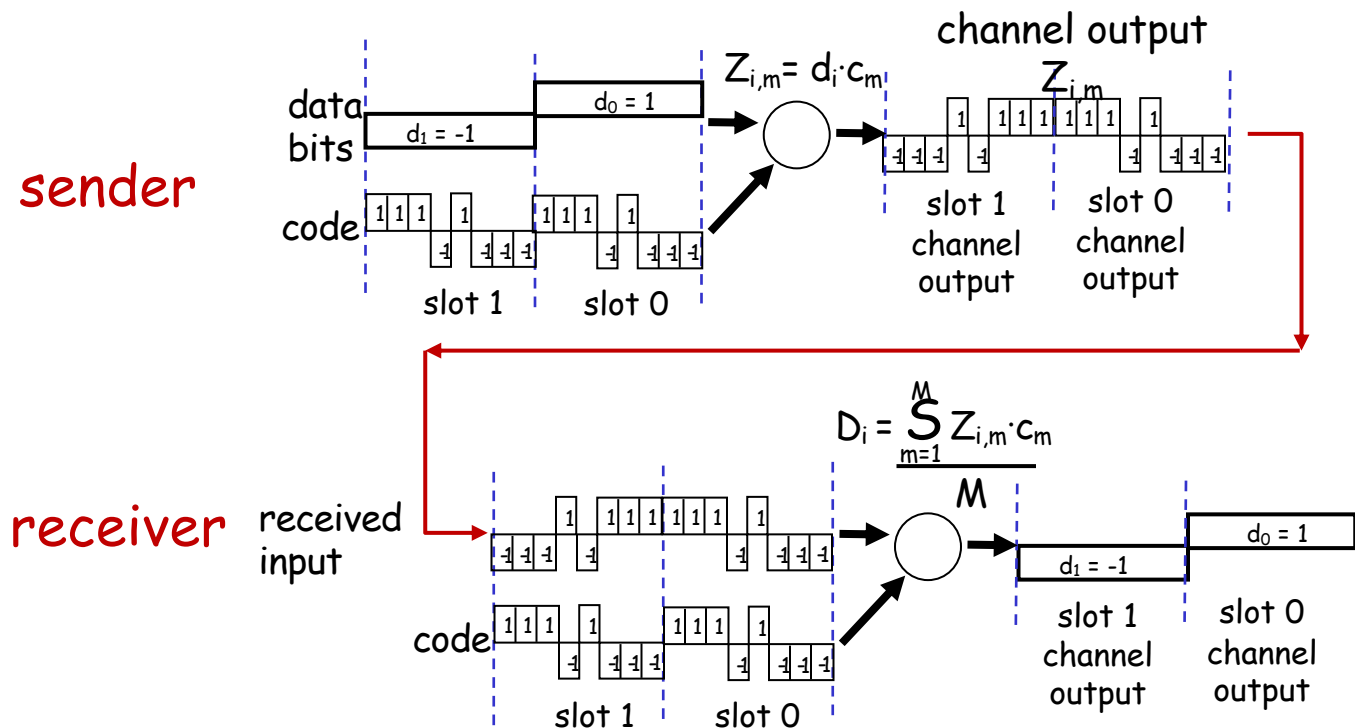

... but this isn't really useful yet!






# CDMA: two-sender interference

Sender 1

Sender 2

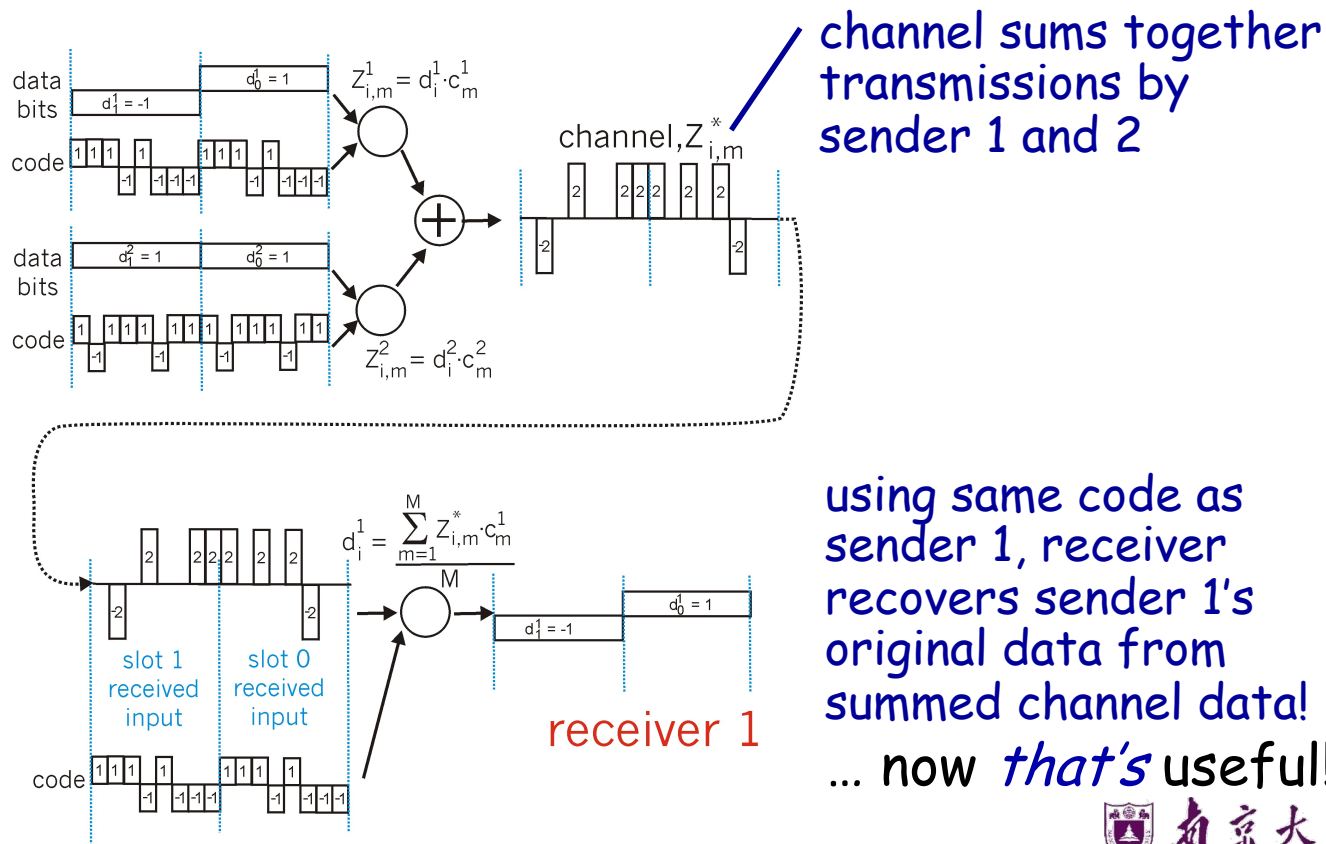



# Outline

---

- Introduction
- Wireless
  - Wireless Links and network characteristics
  - CDMA: code division multiple access
  - WiFi: 802.11 wireless LANs
  - Cellular networks: 4G and 5G
- Mobility
  - Mobility management: principles
  - Mobility management: practice
  - Mobility: impact on higher-layer protocols






# IEEE 802.11 Wireless LAN

IEEE 802.11 standard	Year	Max data rate	Range	Frequency
802.11b	1999	11 Mbps	30 m	2.4 Ghz
802.11g	2003	54 Mbps	30m	2.4 Ghz
802.11n (WiFi 4)	2009	600	70m	2.4, 5 Ghz
802.11ac (WiFi 5)	2013	3.47Gpbs	70m	5 Ghz
802.11ax (WiFi 6)	2020 (exp.)	14 Gbps	70m	2.4, 5 Ghz
802.11af	2014	35 – 560 Mbps	1 Km	unused TV bands (54-790 MHz)
802.11ah	2017	347Mbps	1 Km	900 Mhz

- all use CSMA/CA for multiple access, and have base-station and ad-hoc network versions



# 802.11 LAN architecture

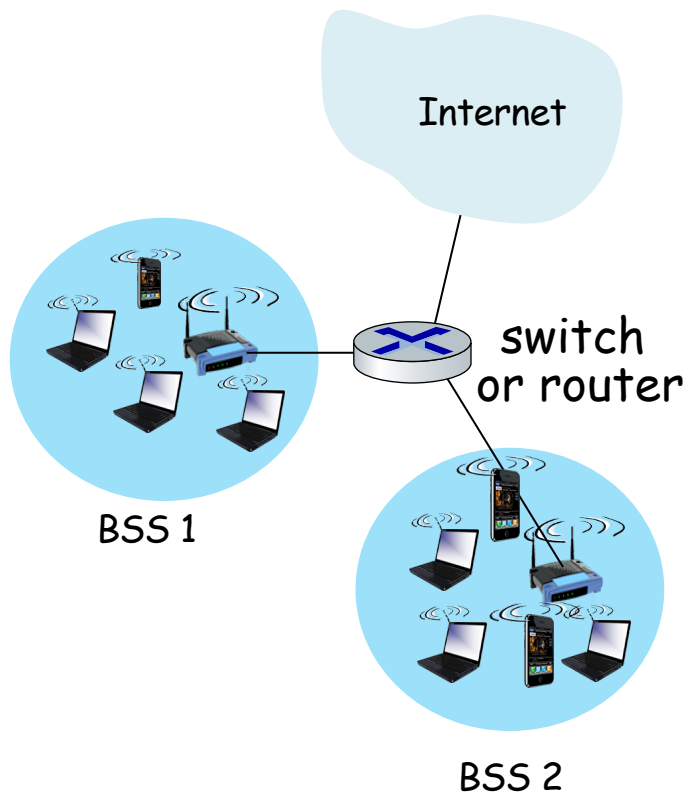

- wireless host communicates with base station
  - base station = access point (AP)
- **Basic Service Set (BSS)** (aka "cell") in infrastructure mode contains:
  - wireless hosts
  - access point (AP): base station
  - ad hoc mode: hosts only






# 802.11: Channels

- spectrum **divided into channels** at different frequencies
  - AP admin chooses frequency for AP
  - interference possible: channel can be same as that chosen by neighboring AP!

Example: 2.4 GHz

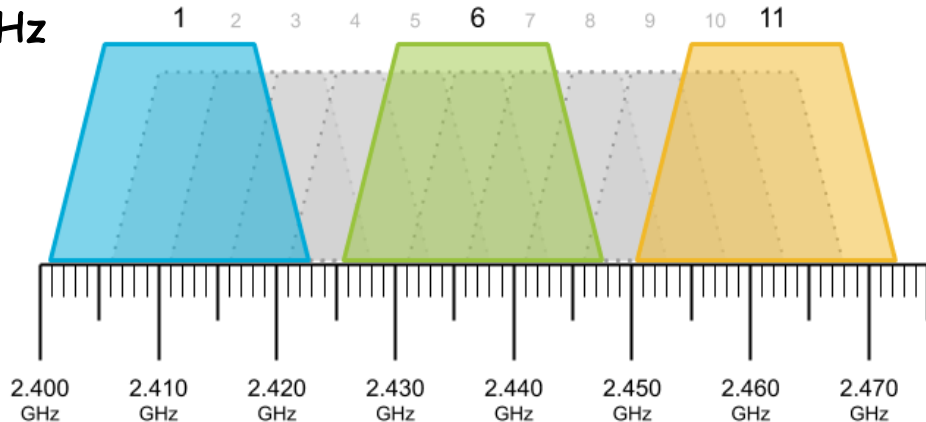




# 802.11: Association

- arriving host: must **associate** with an AP
  - scans channels, listening for **beacon frames** containing AP's name (SSID) and MAC address
  - selects AP to associate with
  - then may perform authentication [Chapter 8]
  - then typically run DHCP to get IP address in AP's subnet






# 802.11: passive/active scanning

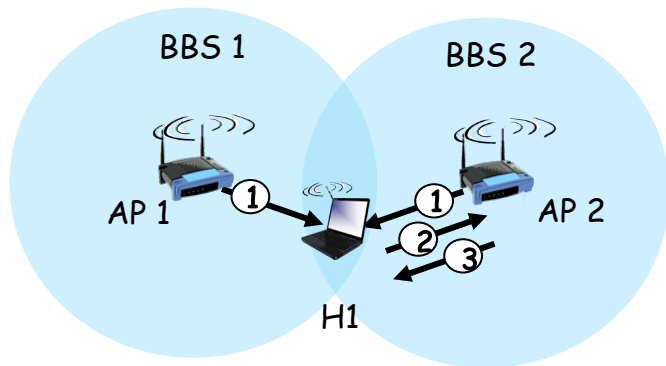

## passive scanning:

- (1) beacon frames sent from APs
- (2) association Request frame sent: H1 to selected AP
- (3) association Response frame sent from selected AP to H1

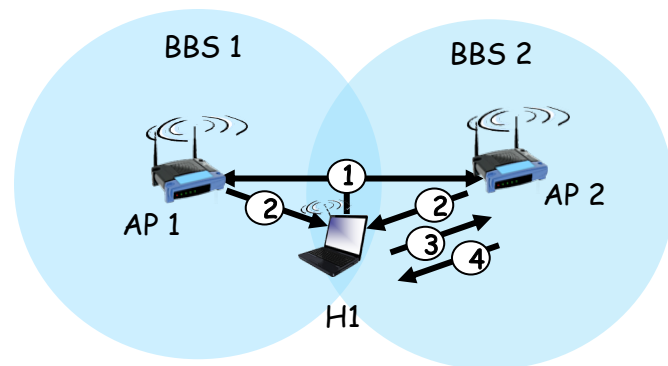

## active scanning:



- (1) Probe Request frame broadcast from H1
- (2) Probe Response frames sent from APs
- (3) Association Request frame sent: H1 to selected AP
- (4) Association Response frame sent from selected AP to H1





# IEEE 802.11: multiple access

- avoid collisions: 2+ nodes transmitting at same time
- 802.11: CSMA - **sense before transmitting**
  - don't collide with detected ongoing transmission by another node
- 802.11: **no collision detection!**
  - difficult to sense collisions: high transmitting signal, weak received signal due to fading
  - can't sense all collisions in any case: hidden terminal, fading
  - goal: *avoid collisions*: CSMA/Collision Avoidance

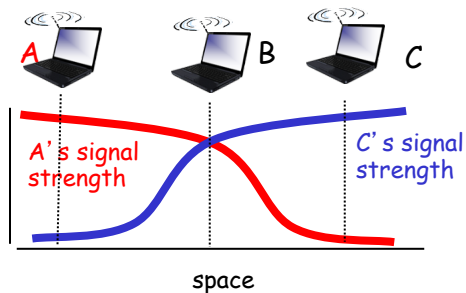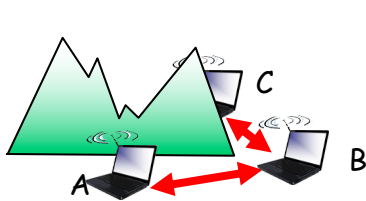




# IEEE 802.11 MAC Protocol: CSMA/CA

## 802.11 sender

- 1 if sense channel idle for DIFS then  
transmit entire frame (no CD)
- 2 if sense channel busy then  
start random backoff time  
timer counts down while channel idle  
transmit when timer expires  
if no ACK, increase random backoff interval,  
repeat 2

## 802.11 receiver

- if frame received OK  
return ACK after SIFS (ACK needed due to hidden terminal problem)

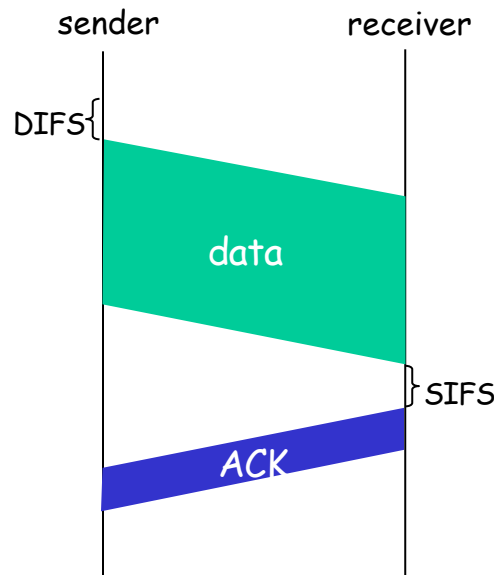



# Avoiding collisions (more)


**idea:** sender “reserves” channel use for data frames using small reservation packets

- sender first transmits **small request-to-send (RTS)** packet to BS using CSMA
  - RTSs may still collide with each other (but they're short)
- BS broadcasts **clear-to-send CTS** in response to RTS
- CTS heard by all nodes
  - **sender transmits data frame**
  - **other stations defer transmissions**






# Collision Avoidance: RTS-CTS exchange

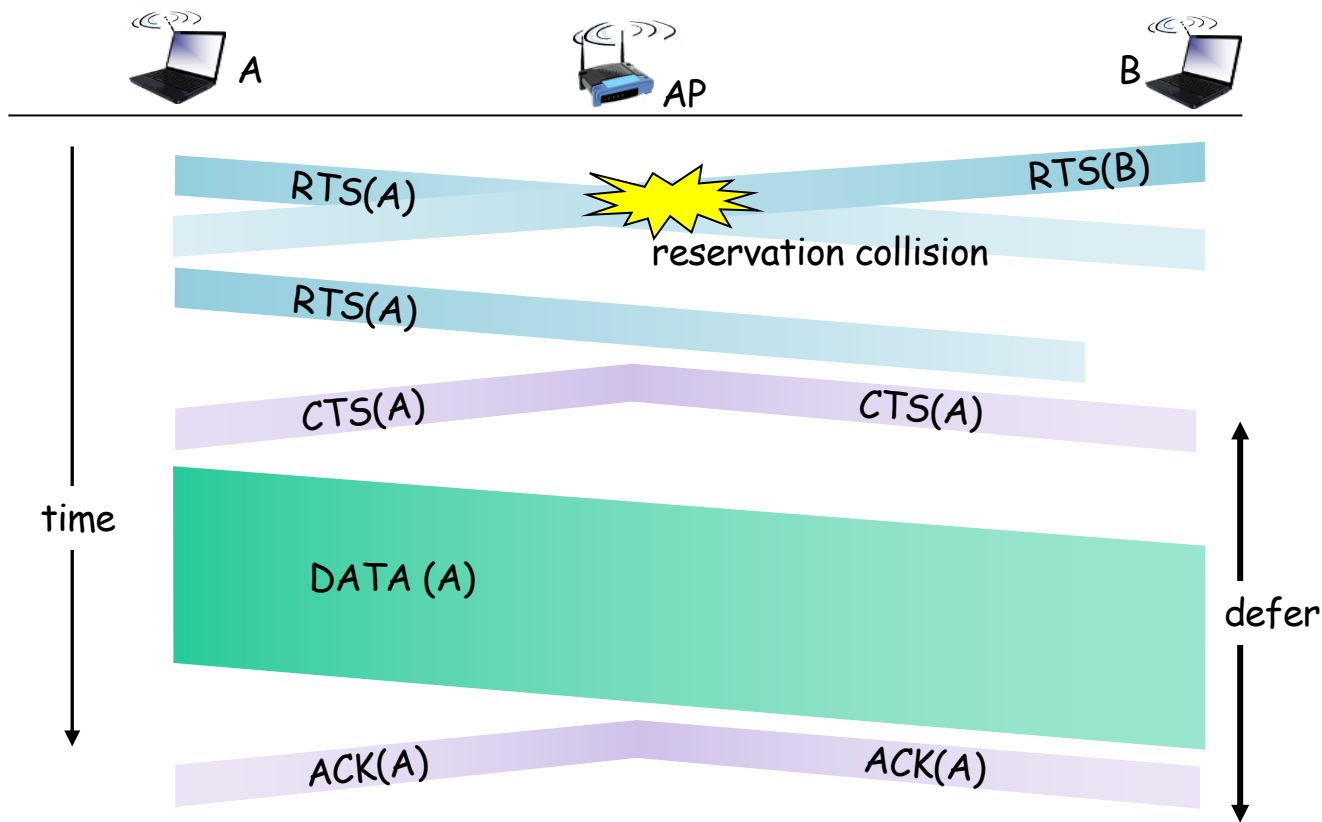



# 802.11 frame: addressing

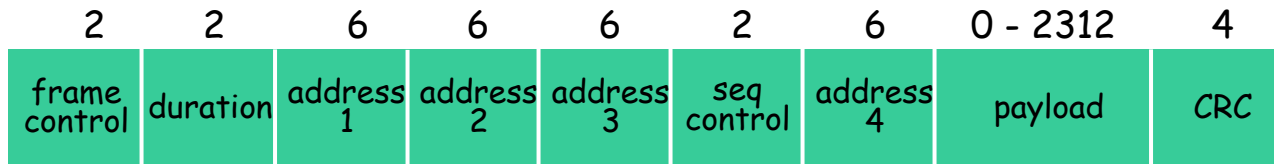

**Address 1:** MAC address of wireless host or AP to **receive** this frame

**Address 2:** MAC address of wireless host or AP **transmitting** this frame


**Address 3:** MAC address of **router interface** to which AP is attached

**Address 4:** used only in **ad hoc mode**






# 802.11 frame: addressing

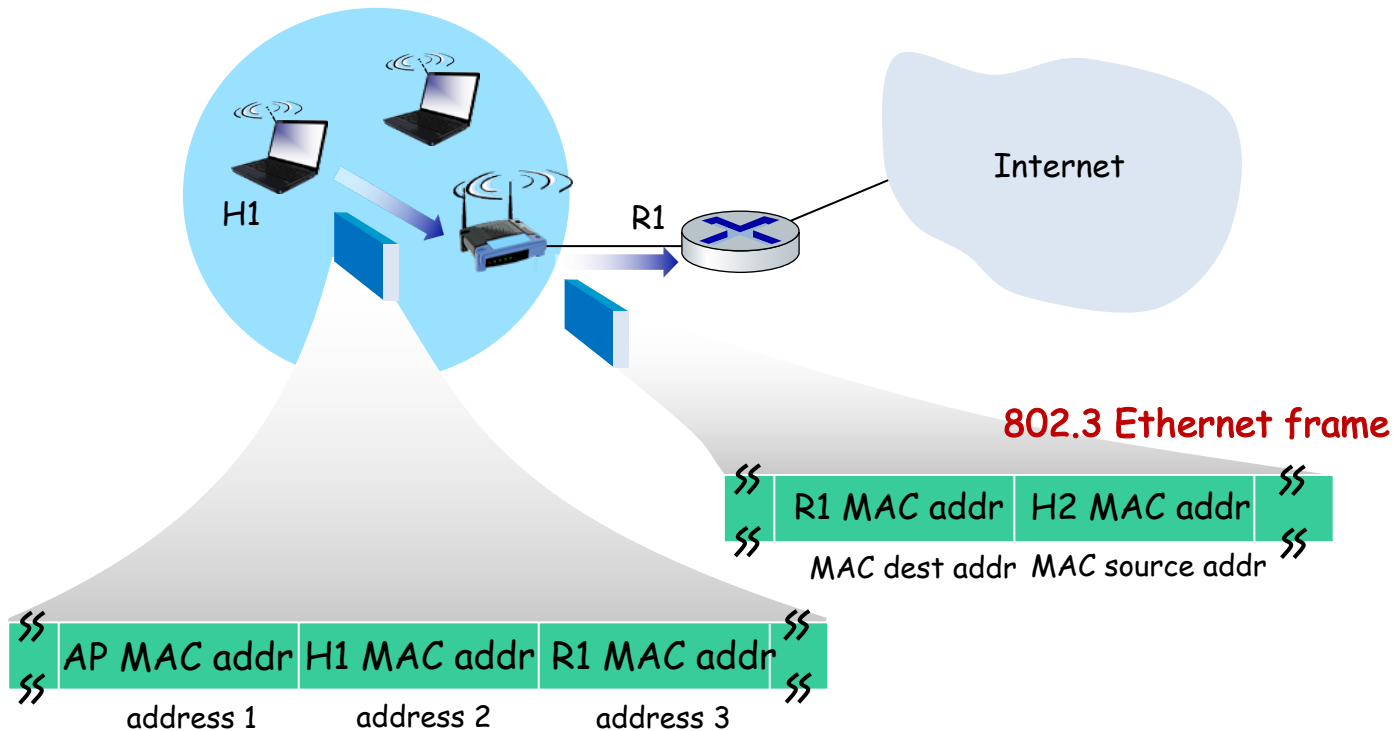

802.11 WiFi frame




# 802.11 frame: addressing

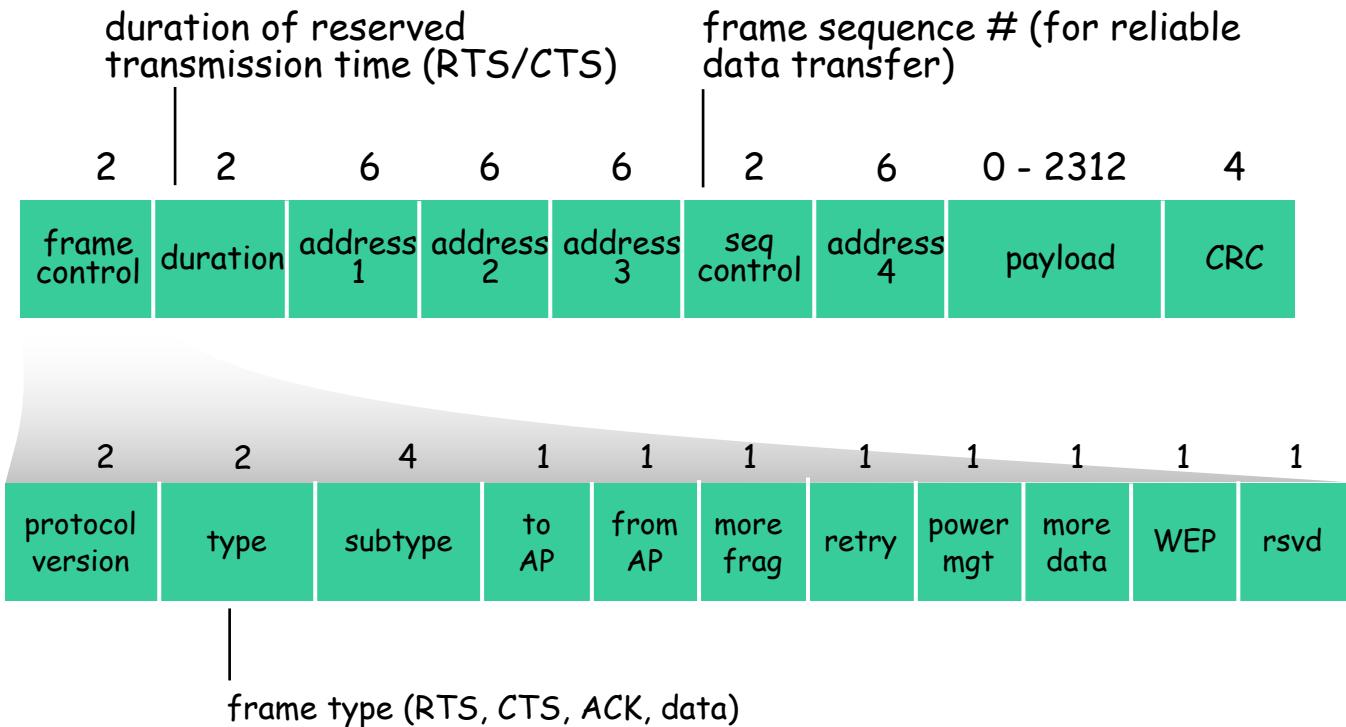



# 802.11: mobility within same subnet

- H1 remains in **same IP subnet**:  
IP address can remain same
- switch: which AP is associated with H1?
  - self-learning (Ch. 6): switch will see frame from H1 and "remember" which switch port can be used to reach H1

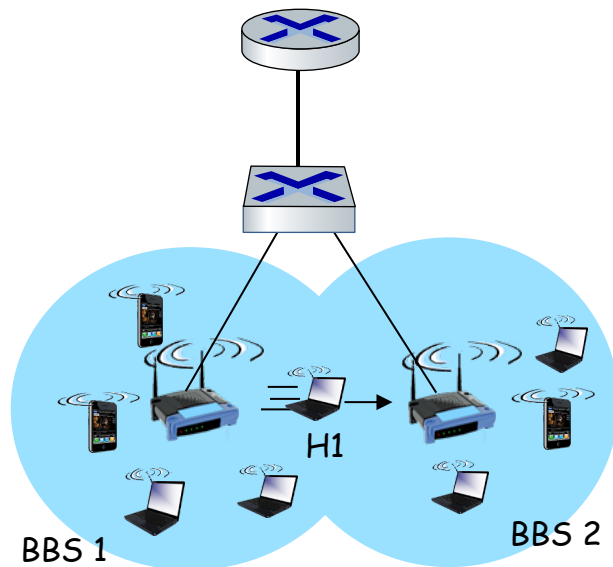




# 802.11: advanced capabilities

## Rate adaptation

- base station, mobile dynamically change transmission rate (physical layer modulation technique) as mobile moves, SNR varies
- SNR decreases, BER increase as node moves away from base station
  - When BER becomes too high, switch to lower transmission rate but with lower BER

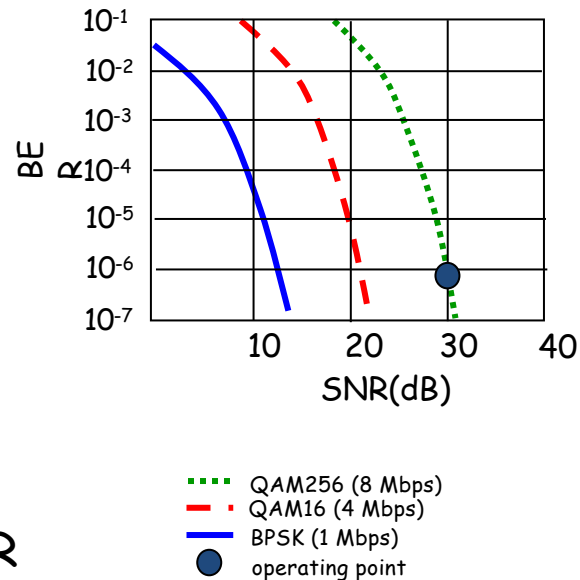



# 802.11: advanced capabilities

---

## power management


- node-to-AP: "I am going to sleep until next beacon frame"
  - AP knows not to transmit frames to this node
  - node wakes up before next beacon frame
- beacon frame: contains list of mobiles with AP-to-mobile frames waiting to be sent
  - node will stay awake if AP-to-mobile frames to be sent; otherwise sleep again until next beacon frame





# Personal area networks: Bluetooth

- less than 10 m diameter
- replacement for cables (mouse, keyboard, headphones)
- ad hoc: no infrastructure
- 2.4-2.5 GHz ISM radio band, up to 3 Mbps
- **master controller / client devices:**
  - master polls clients, grants requests for client transmissions

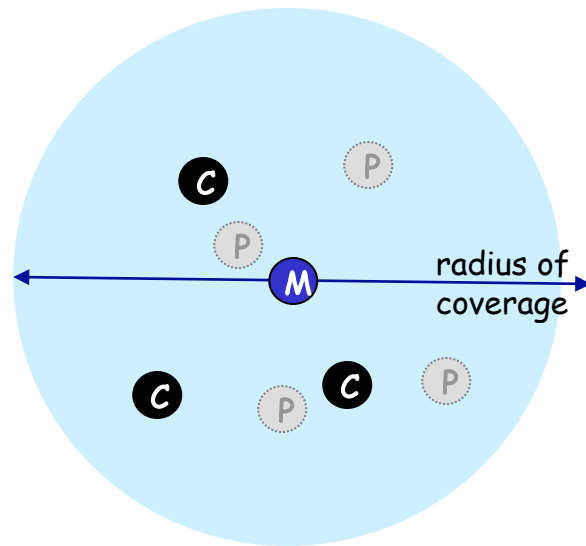





- M master controller
- C client device
- P parked device (inactive)



# Personal area networks: Bluetooth

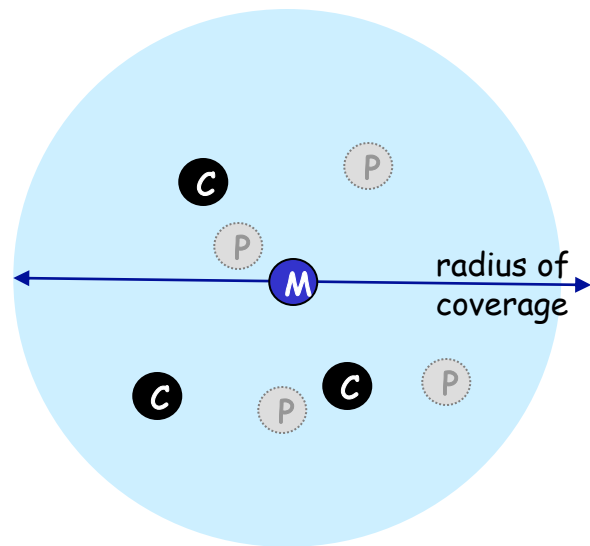- TDM, 625  $\mu$ sec slot
- FDM: sender uses 79 frequency channels in known, pseudo-random order slot-to-slot (spread spectrum)
  - other devices/equipment not in piconet only interfere in some slots
- **parked mode:** clients can “go to sleep” (park) and later wakeup (to preserve battery)
- **bootstrapping:** nodes self-assemble (plug and play) into piconet



-  master controller
-  client device
-  parked device (inactive)





# 提问

## Q & A

殷亚凤

智能软件与工程学院

苏州校区南雍楼东区225

yafeng@nju.edu.cn , <https://yafengnju.github.io/>



南京大學  
NANJING UNIVERSITY